

# **PARTNER**

CARE . TRUST . RESPONSIBILITY

# PT-5900 Touch Terminal



The new PT-5900 is a touch POS Terminal with high performance and equipped with technical features.

The compact construction of the PT-5900 makes it particularly space saving, and can be installed in the smallest spaces.

The PT-5900 is a multifunctional POS System, because of its detachable monitor. The device can be used either with stand or without stand as a wallmount system.

## Special Features

**Intel Atom CPU 1.6GHz**

**Touch Screen, Wallmount Bracket**


**Low power consumption**

**1GB DDR 2 memory support up to 2GB and no moving parts when choose optional SSD**

## Options

**3 tracks magnetic reader, Customer display, Biometric Reader, Smart Card Reader, I-Button, RFID reader, KB-32**

## Touch Terminal PT-5900

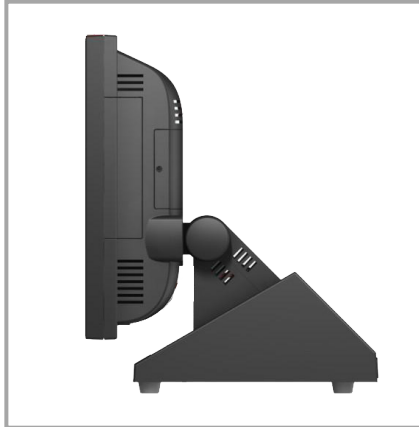

### Technical Datas

<b>Model</b>	<b>PT-5900</b>
<b>CPU</b>	Intel® Atom™ processor D410, 1.6Ghz
<b>Chipset</b>	Intel® NM10 Express
<b>LCD</b>	15" Active TFT color LCD, resolution 1024 x 768
<b>Touch</b>	5-wire Resistive touch (USB Interface)
<b>Memory</b>	1GB DDRII 800/667 DIMM (up to 2 GB)
<b>Ethernet</b>	Gigabit 10/100/1000 Mb/s
<b>Storage</b>	2.5" Type SATA HDD 160GB
<b>I/O Interface</b>	3 * COM Ports 1 * DB-15 VGA Port 1 * DB-25 for LPT Port 1 * PS/2 Keyboard Port 1 * PS2 Mouse Port 1 * RJ-45 LAN Port with activity/ link and Speed LEDs 3 * Audio Ports (1 * Line-in, 1 * Line-out , 1 * MIC-in) 4 * USB 2.0 Ports 1 * DC +12V Power Adaptor Connector
<b>Operation System</b>	Windows 7, Windows XP, XPe, Linux (ubuntu, Fedora) , WEPOS, POSReady,
<b>Power Supply</b>	AC100~240V/DC12V, 7.5A, 90 watt power adaptor
<b>Dimensions</b>	360mm (W) x 246mm (D) x 315mm (H)
<b>Environment</b>	Operating Temperature 0~+40°C Storage Temperature -20° - +60°C Humidity 15%~80%
<b>Options</b>	3 tracks magnetic reader, Customer display module (2 x 20 VFD) Biometric Reader, Smart Card Reader, I-Button, RFID reader KB-32 (32-Keys Keypad), Wallmount Bracket

